

ACOUSTIC CHOICE

UNDERLAYMENT

Specifications

MATERIAL ▶

Crosslinked polyolefin foam

THICKNESS ▶

2 mm

DURABILITY ▶

Compression Set 30% max.
 Compression Resistance (25%) 8.00 lbs. / in.²
 Impact Resistance 1100 mm Light Commercial
 Tensile Strength 95.00 lbs. / in.²

SOUND RATING ▶

Impact Insulation Class (ASTM E 90) 67 IIC
 Sound Transmission Class (ASTM E 492) 67 STC

INSULATION RATING ▶

R-Factor (ASTM C 518)38 R-Value
 Safe for radiant heated floors.

WATER RESISTANCE ▶


Water Vapor Transmission Rate (ASTM E 96) 0.31 lbs. / 24 hours 1000 ft.²

ROLL SPECIFICATIONS ▶


40" x 30' roll, 100 sq. ft.
 80" x 1200' roll, 8,000 sq. ft.

WARRANTY ▶


Equal to the manufacturer's warranted life of the primary floating floor system.

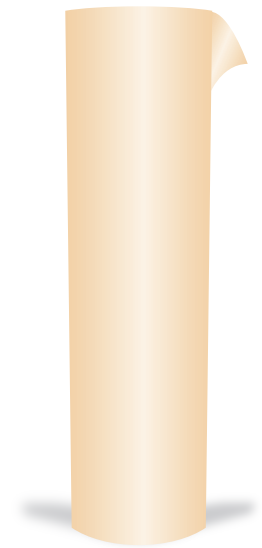

40" X 30' ROLL
 (Also Available in
 80" x 1200' Master Rolls)



6.5"
 ROLL DIAMETER

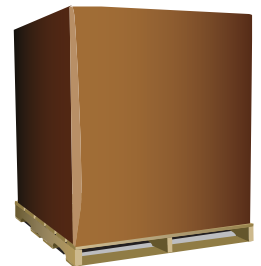

40" X 30' CORELESS ROLLS ARE
 PACKAGED 48 ROLLS PER PALLET